


**ORDER: ACCEPT BID FROM TRI STATE TRUCK CENTER IN THE AMOUNT OF
\$205,405.00 FOR 2026 MACK GRANITE DUMP TRUCK EQUIPPED WITH OX
STAMPEDE BODY**

Motion was made by Tim Gordon, duly seconded by Greg Bynum, to accept bid from Tri State Truck Center in the amount of \$205,405.00 for 2026 Mack Granite Dump Truck equipped with Ox Stampede Body.


The vote on the motion was as follows:

Supervisor Brent Larson, voted yes
Supervisor John Morgan, voted yes
Supervisor Tim Gordon, voted yes
Supervisor Scott Allen, voted yes
Supervisor Greg Bynum, voted yes

After the vote, President Larson, declared the motion carried, this the 19th day of August, 2024.

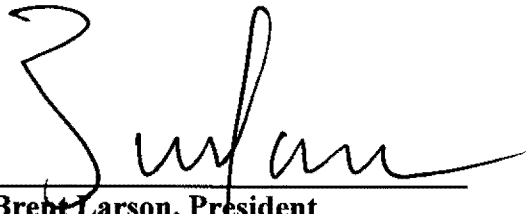

**Brent Larson, President
Board of Supervisors**



Mike Roberts, Chancery Clerk



7/31/2024

Lafayette Co. Board of Supervisors

300 North Lamar Blvd. Suite 114

Tupelo, MS Oxford, MS 38655

Memphis, TN RE: Bid for One (1) or More Tandem Axle Dump Trucks

Jackson, TN

Board Members,

Little Rock, AR

Jonesboro, AR

Tri State Truck Center respectfully submits a bid for one (1) or more new tandem axle Mack Granite Dump Trucks equipped with an Ox Stampede body. The Granite quoted meets or exceeds all specifications required. The price is as follows:

Meridian, MS

2026 Mack Granite equipped with an Ox Stampede Body- \$205,405.00

Jackson, MS

We at Tri State Truck Center in Tupelo appreciate your business in the past and look forward to working with you on your future truck needs. Thank you for the opportunity to bid.

Springfield, MO

Respectfully submitted,

Joplin, MO

A handwritten signature in black ink, appearing to read "Scott Riley".
Scott Riley

Tri State Truck Center

Tupelo, MS

662 891 7507

LEGAL NOTICE

Notice is hereby given that the Board of Supervisors of Lafayette County, Mississippi, will at 2:00 p.m. on Friday, the 2nd day of August, 2024, accept and open sealed, competitive bids for the purchase of one (1) or more new dump trucks for the Lafayette County Road Department. Plans and specifications are on file in the Office of the County Administrator, 300 North Lamar Blvd., Oxford, MS 38655 and online at www.lafayettemsbsids.com. The Board reserves the right to reject any and all bids and to waive informalities.

Sealed, competitive bids may be delivered to the Lafayette County Chancery Clerk's Office, 300 North Lamar Blvd, Suite 114, Oxford, Mississippi 38655, or mailed to the Lafayette County Chancery Clerk, P.O. Box 1240, Oxford, MS 38655 or electronic bids may be submitted at www.lafayettemsbsids.com until 2:00 p.m. on Friday, August 2nd, 2024.

Done by unanimous vote of the Board of Supervisors of Lafayette County, Mississippi, this the 1st day of July, 2024.

LAFAYETTE COUNTY BOARD OF SUPERVISORS

BY: 

BRENT LARSON, President

**Publication dates: July 10th, 2024
July 17th, 2024**

Posted at www.lafayettemsbsids.com

**Required Specifications for One or more New 2026 or newer Tandem Axle Class 8 Truck
Equipped with a 16 Foot Elliptical Dump Body**

Engine Equipment:	YES	NO	OFFERED
445HP @ 1400-1700 RPM 1850 LB Torque	✓	—	—
In Line 6 Cylinder Diesel Engine	✓	—	—
Common Rail Fuel Injection System	✓	—	—
Variable Geometry Turbocharger	✓	—	—
Engine Must Meet All US 21 Greenhouse Gas			
Application	✓	—	—
Air Cleaner Under Hood Single Element			
Dry type with Air intake From Both sides of Hood	✓	—	—
Bug Screen Black Aluminum Mounted Behind Grill	✓	—	—
Air Compressor/Dryer Wabco SS-HP W/ WABCO 318	✓	—	—
Alternator Delco 12 V 165 Amp (36SI) Brushless	✓	—	—
Batteries 3- 12V 1000/3000 CCA Threaded Stud Type	✓	—	—
Battery Box Cover Polished Aluminum	✓	—	—
Battery Disconnect Switch Flaming River	✓	—	—
Starter Motor 12 Volt Delco 39 MT-MXT	✓	—	—
Engine Brake	✓	—	—
Fan Drive - Behr Fan Drive	✓	—	—
Extended Life Coolant	✓	—	—
1296 SQ. Inch Radiator	✓	—	—
Engine Block Heater 120V 1500 Watt	✓	—	—
6.6 Gallon DEF Tank- Left Side Mounted	✓	—	—
Single Vertical Right Side Mounted Exhaust 9'6"			
From ground	✓	—	—

Transmission/Driveline Equipment:

	YES	NO	OFFERED
Allison 4500 RDS 6 speed Transmission	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Main Driveline-Spicer SPL250HDXL LARGE	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Interaxle Driveline SPICER 250 XL	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
75W-90 Synthetic Transmission Lubricant	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Transmission Cooler	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

FRONT AXLE EQUIPMENT:

Front Axle 20,000LB Spindle/Unitized Bearings	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Front Springs 20,000 LB Taperleaf	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Front Brakes Meritor "S" Cam	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Heavy Duty 16.5x 7 inch Q+	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Front Axle Dust Shields	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Ferrous Front Hubs	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Double Acting Shock Absorbers	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Power Steering Shepard SD110+HD 94	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

REAR AXLE EQUIPMENT:**YES****NO****OFFERED**

46,000LB. Multileaf Suspension

☒☐☐

Driver Controlled Locking Differential Rear

Axles All AXLES

☒☐☐

46,000LB Double Reduction Rear Tandem Axle

(No EXCEPTIONS)

☒☐☐

3.79 Rear Axle Ratio

☒☐☐

Rear Brakes Meritor "S" Cam

16.5 x 7 inch Q+

☒☐☐

Rear Dust Shields

☒☐☐

Rear Brake Chamber Size 30/30 Type

☒☐☐

Power Divider Lockout w/ Buzzer and Light

☒☐☐

Synthetic Rear Lubricant

☒☐☐

Bendix ABS with Traction Control

☒☐☐**Frame Equipment/Fuel Tanks:**

Wheelbase 226 inches

☒☐☐

After frame 57 inches

☒☐☐

Frame Rails 11.1 x 105 x 300 MM

(.437" x 4.13"x11.81"); RBM 3,160,000 LB-IN

☒☐☐

Front Frame Extension 6 inch Bolted On

☒☐☐

Front Frame Length 725 MM

☒☐☐

Crossmembers BOC and Intermediates Steel

HD Back-to-Back Channel

☒☐☐

Bumper to Back of Cab 116.5"

☒☐☐

	YES	NO	OFFERED
Front Bumper Extended Swept Back Steel Bright Finish	<u>✓</u>	<u> </u>	<u> </u>
Front Cab Guard Plate Type Bright Finish	<u>✓</u>	<u> </u>	<u> </u>
Front Towing Device Center Tow Capability	<u>✓</u>	<u> </u>	<u> </u>
111 Gallon Aluminum Fuel Tank D Shaped	<u>✓</u>	<u> </u>	<u> </u>

AIR/BRAKE

Manual Drain Valve, Lanyards on Brake system Tanks	<u>✓</u>	<u> </u>	<u> </u>
Fuel Hoses, Wire Braided	<u>✓</u>	<u> </u>	<u> </u>
Bright Finish Aluminum Steps and Stainless Steel Bright Finish	<u>✓</u>	<u> </u>	<u> </u>

CAB INTERIOR

Rear Axle Temp Gauge	<u>✓</u>	<u> </u>	<u> </u>
Blend Air HVAC wit ATC Temp Regulation	<u>✓</u>	<u> </u>	<u> </u>
5LB Fire Extinguisher (ABC Rated/AMEREX)	<u>✓</u>	<u> </u>	<u> </u>
Mounted Between LH Seat Base and Door	<u>✓</u>	<u> </u>	<u> </u>
Premium Stereo AM/FM, MP3, Weather Band, Bluetooth, Sirius	<u>✓</u>	<u> </u>	<u> </u>
CB Connections Mounted in Headliner	<u>✓</u>	<u> </u>	<u> </u>
Drivers Seat High Back 4 Chamber Air Lumbar Bolster Extension-Graphite Mordura	<u>✓</u>	<u> </u>	<u> </u>
Passenger Seat - Fixed High Back w/ Storage	<u>✓</u>	<u> </u>	<u> </u>

	YES	NO	OFFERED
Steering Wheel 2 Spoke Urethane Grip			
Satin Aluminum with Switches	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CAB EXTERIOR			
Bright Finish Grill Surround	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Exterior Grab Handles	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2 Rectangular Single Trumpet Horns	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
LH and RH Heated and Motorized Exterior			
Mirrors w/ Illumination	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Exterior Stainless Steel Sun visor	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Headlights: LED Heated	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

WHEELS AND TIRES

425/65 R 22.5 L Front tires	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Front and Rear High Polished Aluminum Wheels	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
11.25 H Rear Tires	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	YES	NO	OFFERED

Dump Body Equipment

21/22 YARD Body	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
16 FT	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Frame Style 2x8 RT (Frameless)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Rear Style- Straight	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Front Height: 60" sloped	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Side Height Front: 62" 1/4 AR 450	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Side Height Rear: 62" ¼ AR 450

Rear Height: 68" ¼ ar 450

Floor Material: 1/4" AR 450

YES

NO

OFFERED

Cab shield Style: standard

Cab shield Projection: 24 "

Cab shield Width: 87"

Tarp Style: Mountain

Tailgate Type: High Lift

Tailgate Operation- Air Tailgate

Tailgate Bracing Style: Outer Frame Only

Dump Apron Sch#80-10"

Side Light Cut Outs: Lower -Front

Front/Rear Clearance

Cab shield Cutouts: 1 set

Grommet Style

Black Painted

Strobes front and rear

Rear Hitch-22" 45Ton W/Glad 7-Pin

Electric Brake Controller

Bed Vibrator

GENERAL REQUIREMENTS

	YES	NO	OFFERED
Selling Dealer shall have a Service Facility within 60 miles of Oxford, MS .	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Selling dealer must be able to provide mobile service for Chassis repairs	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

State miles from selling dealer and selling dealer service facility from Oxford, MS
55 miles